


EXCELLENT FOR THE MUNICIPAL SECTOR

B

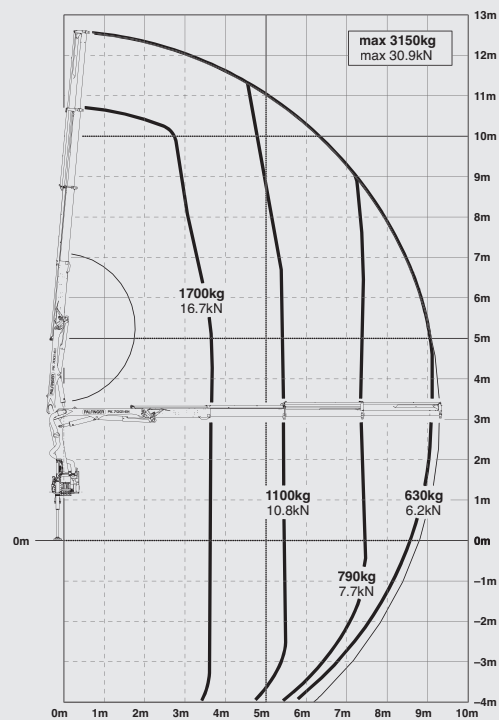

LIFTING CAPACITIES

max.		3300 kg	7270 lbs
3.5 m	11' 6"	1880 kg	4150 lbs
5.3 m	17' 5"	1240 kg	2750 lbs

A	max.		3200 kg	7050 lbs
	3.6 m	11' 10"	1780 kg	3950 lbs
	5.4 m	17' 9"	1160 kg	2600 lbs
	7.2 m	23' 7"	860 kg	1900 lbs


B	max.		3150 kg	6940 lbs
	3.7 m	12' 2"	1700 kg	3750 lbs
	5.5 m	18' 1"	1100 kg	2400 lbs
	7.3 m	23' 11"	790 kg	1740 lbs
	9.2 m	30' 2"	630 kg	1380 lbs
	11.2 m*	36' 9"	400 kg	880 lbs
	12.8 m*	41' 12"	220 kg	490 lbs

C	max.		3100 kg	6830 lbs
	3.8 m	12' 6"	1620 kg	3550 lbs
	5.6 m	18' 4"	1040 kg	2250 lbs
	7.4 m	24' 3"	730 kg	1620 lbs
	9.3 m	30' 6"	570 kg	1260 lbs
	11.1 m	36' 5"	470 kg	1020 lbs
	12.7 m*	41' 8"	220 kg	490 lbs



*mechanical extension

PERFECT DIMENSIONS


EXTENSION BOOM VARIATIONS

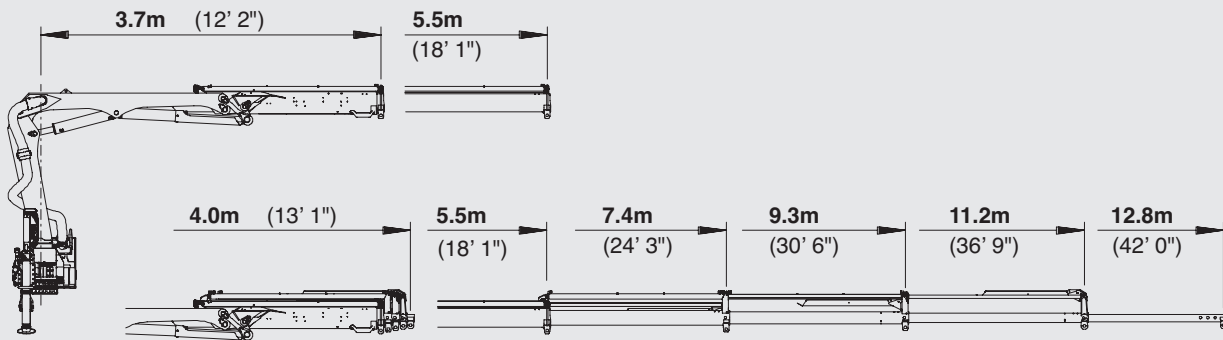

DIMENSIONS

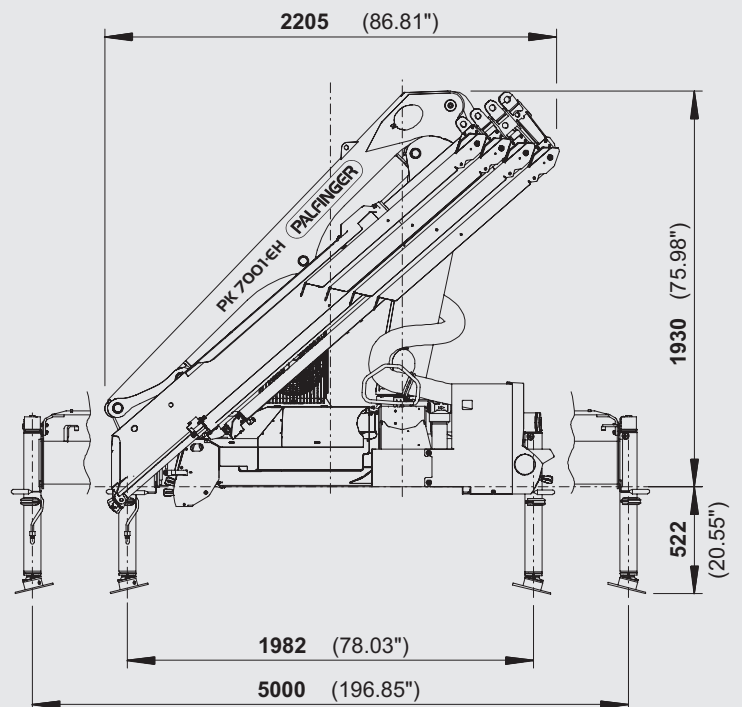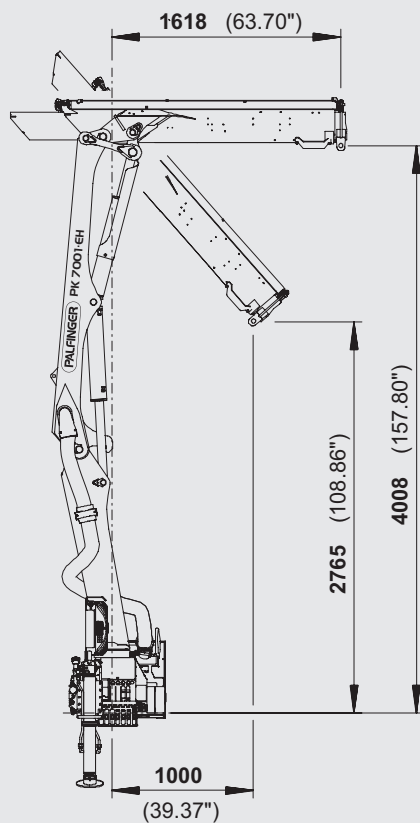

PK 7001 EH

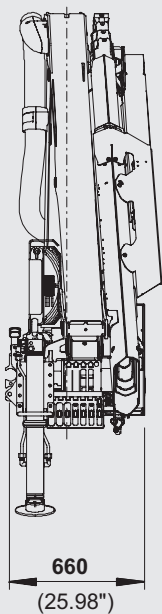

TECHNICAL SPECIFICATIONS (EN 12999 HC1 HD4/B3)

Max. lifting moment	6.6 mt/64.7 kNm	47750 ft.lbs
Max. lifting capacity	3300 kg/32.4 kN	7270 lbs
Max. hydraulic outreach	11.2 m	36' 9"
Max. manual outreach	12.9 m	42' 4"
Slewing angle	400°	
Slewing torque	0.8 mt/7.8 kNm	5790 ft.lbs
Stabiliser spread (std./max.)	3.0 m / 5.0 m	9' 10" / 16' 5"
Fitting space required (std.)	0.66 m	2' 2"
Width folded	2.20 m	7' 3"
Max. operating pressure	350 bar	5075 psi
Recommended pump capacity	from 30 l/min to 40 l/min	7.9 US gal./min 10.6 US gal./min
Dead weight (std.)	779 kg	1720 lbs

PACKAGE MODEL

- E-HPLS
- Paltronic 50
- Radio remote control with LED display
- Danfoss control valve or PVG2000
- 75 l oil tank